




Brittle and Memorable Landscape Prescribed Burn Projects

14,500+ Acres Xeric Soils

Annual Precipitation is around 28-29"

Surface fuels are primal sedges, cool season grass, and blueberry

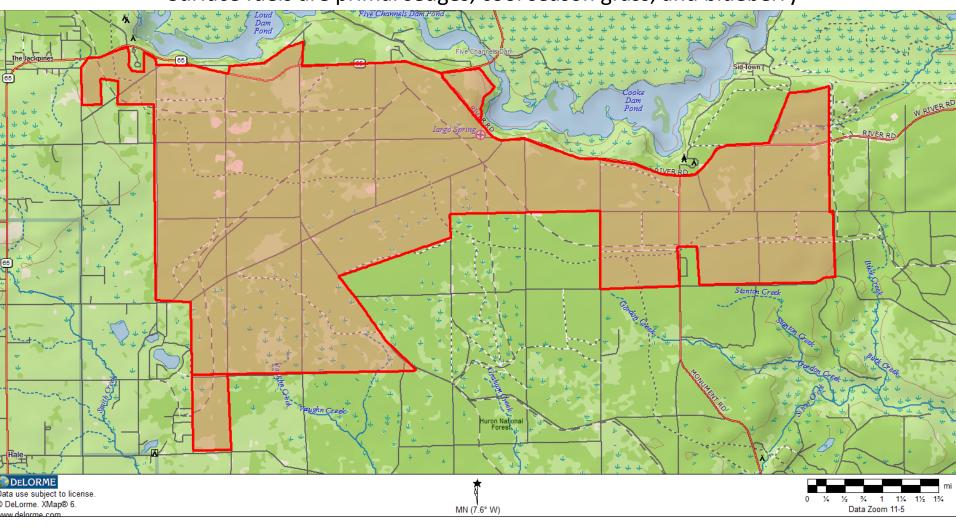




Measurements

- Fuel loading
- Duff / litter
- Fire severity
- Surface fire behavior potential
- Photo series
- Mortality / snag creation
- Crown scorch
- Bole char / char depth
- Crown bulk density
- Soils / carbon content
- Vegetation mapping
- Fire behavior
- Smoke
- Needle Density

Plot Measurement Schedule and Frequency

Burn Name	Primary	Pre-Burn				
	Fuel Type	Date	Last Burn	Mortality	Post-Burn	Next
			Date	Study Date	Date	Measurement
Brittle Block 01	Red Pine Aspen	9/25/2008	4/28/2009	9/12/2010 6/06/2014	9/12/2010 6/06/2014	Year 2017
Brittle Block 09	Red Pine / Jack pine	5/7/2005	4/17/2008	06/24/09	6/24/2009	Year 20114
Brittle Block 10	Red Pine/ Jack pine	4/13/2014	4/28/2014	5/8/2014	5/8/2014	Year 2017
Brittle Block 12	Red Pine	09/28/06	4/24/2007	8/20/2009	08/20/09	Year 2015

Pre-Burn (1 year before)
Post- Burn (within 1 year)
Post- Burn 3-5 years

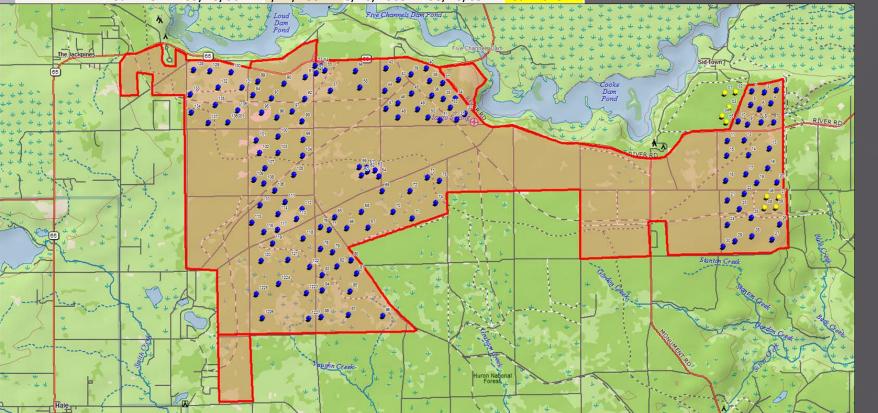

PROTOCOLS

Fire Monitoring Handbook. USDI **National Park** Service. 2003

After arriving at plot center, record the coordinates in either lat/long or UTM with the GPS. Also note the stand and compartment information (Figure 1). Fill in the header.

If wearing an analog watch, the azimuth of the 1st transect is chosen by the direction of the minute hand. A random azimuth for the 1st transect can be selected by choosing a number between 0 and 360. The other 3 transects are laid out clockwise at 90° angles from the previous transect: 1st transect = 161°, 2rd = 251°, 3rd = 341°, 4th = 71° (Figures 2 and 3). A random number generator has been provided (Table 1).

Place a permanent marker (stake, wire flag) at plot center. Measuring tapes should be laid out to 50 ' from plot center.

Record the length of transects for time lag fuels.

Transect lengths	Diameter of debris							
Downed material	0-1 in	1-3 in	>3 in					
Nonslash (naturally fallen material)	6 ′	10-12	35-50					
Discontinuous light slash	6.	10-12	35-50					
Continuous heavy slash	3 .	6.	15-25					

Record the azimuth and slope for each transect

Record the number of intercepts for each time lag fuel class.

For the 1000+ fuels, a diameter and species is recorded for each intercept. The 1000+ fuels are also classified as "sound" or "rotten" and recorded in the appropriate column. If a species cannot be identified, note pine or hardwood.

Tally rules for fuel classes:


- 1. Only downed, dead woody material from trees and shrubs on the litter layer are recorded. Do not record:
- Leaves cones bark flakes needles grass forbs undisturbed stumps dead stems or branches still attached to standing trees or shrubs Only record the 1-, 10-, and 100-hr fuels along the prescribed length of the transect (1-
- If a piece intersects the tape measure more than once, count all intercepts.
- 4. If the end of a piece intersects the taper, only record it if the central axis is crossed.
- 5. Estimate the diameter of rotten logs that fallen apart by visualizing a cylinder to contain
- Downed material can be sample up to any height, so be sure to look up from the ground. An upper cutoff of 6' can be used; adjust as necessary in heavy slash.

Plot ID: Coordinates:/											
ircle one	and indic	ate numb yr02	er of tim yr05_	Recorder estreat yr10	ed, e.	g., 01-y yr20 Ot	r01, 02- her:	yr01 yr;_	mo_	_	
Transect lengths, in feet: 0025" 0.25-1" 1-3" 3+s 3+r											
# 0	of interce	pts	Diame	ter (in)		Litter	and Du	f Dep	ths (in)		
25"	25.4"	. 7"	3+s	3+r							
125" (1-hr)	.25-1 (10hr)	1-3 (100hr)	(100	0hr)		L	D		L	D	
					1			25			
					5			30			
					10			35			
					15			40			
					20			45			
	ircle one ost ths, in fe # ()-,25"	ircle one and indicostyr01 ths, in feet: 0025 # of interce 	ircle one and indicate numb ost	ircle one and indicate number of tim sst	B/C (Circ Recorder Recorder	B/C (Circle One Recorders: Recorders:	B/C (Circle One) Dai Recorders: Simple Simple	B/C (Gircle One) Date:	B/C (Circle One) Date:	B/C (Grcle One) Date:/ Recorders: / Recorders: / /	

Litter and duff are also recorded at set intervals along the length of each transect (Figure 4).

The first measurement is taken 1 foot from the plot center and the next at the 5 ' mark. After that measurements are taken every 5 feet, ending at the 45' mark.

- Record duff and litter measurements after fuel intercepts have been tallied.
- Record litter to the nearest whole inch.
- Measure duff to the nearest 0.1 inch or .25 inch (depending on ruler used).
 Litter is still recognizable as its former self before death (it still looks like a neede).
- 5. Duff is the decomposed litter (it is no longer recognizable as a needle). 6. When stumps, logs and trees occur at the points of measurement, offset 1 perpendicularly to the right.

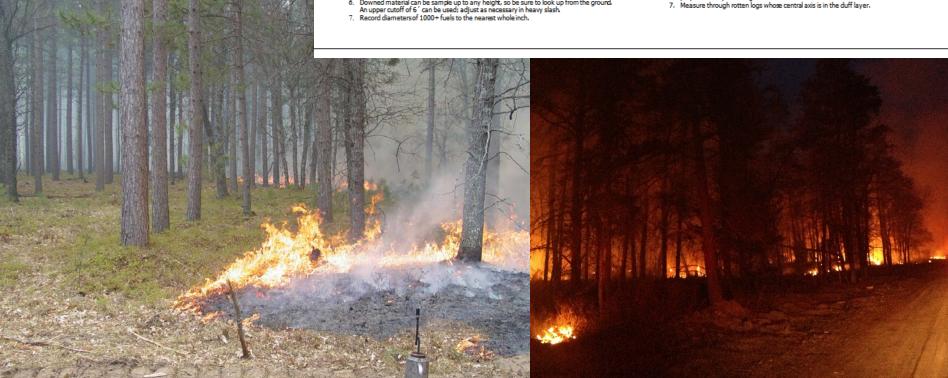

Brown's Fuel Transect	Fuel Load	Calculator	Brittle Bloc								
		PostBurn		5/29/2014							
Note: Transect lengths are in feet; 1000 hr fuel diameters, duff and litter depths are in inches											
Required Field	Optional De	faults	Products								
Slope %***	0										
	L	0	.10. *	_ ++	T /A	W f 0					
1 hr	Length ft			<u>s**</u> 0.61	Tons/Acre 0.032						
1 nr 10 hr	16 80	2.25 1.875									
10 hr	80	0.5									
100 111	00				0.092	0.021					
			Sum d² (Be								
1000 hr Solid	240										
1000 hr Rotten	240		73.00	0.46	1.629	0.365					
55	Bulk Densi				4 440	0.040					
Litter loading	2.50				1.418						
Duff loading	4.30 0.31				8.414	1.886	<u>Inches</u> 0.313	<u>cm</u>	794		
Litter depth Duff depth	1.08						1.078		738		
Dun depth	1.08						1.078	<u> </u>	. 1 36		
Total Fine					0.159	0.036					
Total Heavy					2.403						
Total Litter/Duff					9.832						
Grand Total					12.394						

Data Collection



Plot	Date	Tree #	Tree Spp		Tree Height		Crown Ratio %	Crown	Crwn Scorch (% Live)		Min. Bole	char depth 10th "	Live / Dead	Insect Activity	Decay	Cavity	Remarks
BR10-1	5/29/2014	1	RP	15.2	28	18	60	со	100	4	1	0.12	L	N	N	N	
		2	OAK	15	27	N/A	0	CO	N/A	4	1	0.08	D	N	N	N	
BR10-10	5/29/2014	1	RP	9	30	4	90	CO	90	6	0.5	0.16	L	N	N	N	MECH. SCAR
		2	RP	11	30	20	50	со	100	6	0.5	0.12	L	N	N	N	MECH. SCAR





Fire behavior from aerial ignition Slash Model 2 (SB2). Flame Length 7'

DATE	Burn Name	Time of Burn	Day of Last Rain	Rain (in)	Temp (F)	Rh %	Wind Spd	Wind Dir	F.L. (ft)	R.O.S (ft/min)	Notes	Acres	Est. Mortality
											Strip head fire w/ Heli, lake		-10/
4/19/2014	Brittle Block 20	16:30-19:30	4/14/2014	0.7	44-51	40-57	0-8	SE & E	1 to 6'	1 to 2	wind	1017	<1%
4/19/2014	Brittle Block 18	16:30-19:30	"	11	44-51	40-57	0-8	SE & E	1 to 6'	1 to 2	Strip head fire w/ Heli	356	<1%
4/19/2014	Brittle Block 10	16:30-19:30	"	11	44-51	40-57	0-8	SE & E	1 to 6'	1 to 2	Strip head fire w/ Heli	637	<1%
											Strip head fire w/ Heli, lake		-10/
4/27/2014	Brittle Block 3	13:45-17:54	4/25/2014	0.1	48-52	31-48	0-10	S to NE	1 to 5'	.5-1.5	wind	648	<1%
4/27/2014	Brittle Block 4	13:45-17:54	"	11	48-52	31-48	0-10	S to NE	1 to 5'	.5-1.5	Strip head fire w/ Heli	553	<1%
4/27/2014	Brittle Block 5	13:45-17:54	"	11	48-52	31-48	0-10	S to NE	1 to 5'	.5-1.5	Strip head fire w/ Heli	579	<1%
5/5/2014	SBWH Block 2	11:27-1345	2 days	0.44"	48-52	39-51	3 to 10	Se-E	0.5-3'	0.5-1.5	ATV torch, lake wind	195	1%
5/5/2014	SBWH Block 3	15:00-17:35	2 days	0.44"	48-52	39-51	3 to 10	Se-E	0.5-3'	0.5-1.5	ATV torch	80	2%








Pre Burn Post Burn



Results

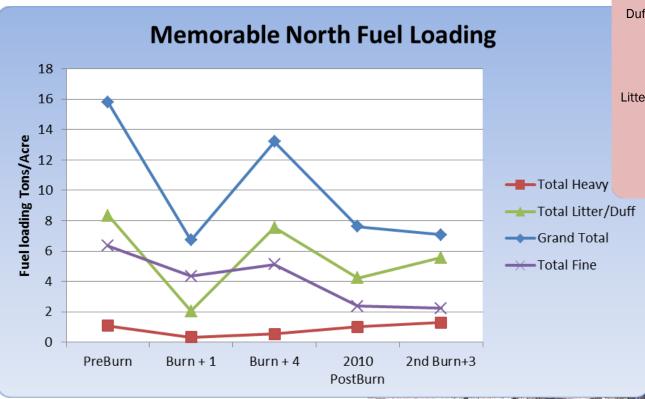

Project Litter / Duff Depth Duff depth Litter depth Pre-Burn

inches




		Pre-Burn	
	Blk 4	Blk 10	Ave
Litter loading	7.297	9.035	8.166
Duff loading	6.882	11.426	9.154
		Post-Burn	
Litter loading	1.992	1.485	1.739
Duff loading	4.206	8.475	6.341

Jack pine =1,403.95 acres (largest stand is 246.1acres)


White pine =26.4 acres


Aspen (Quaking and trembling) = 252.5 acres (largest stand is 52.2 ac)


Oak (Black or Northern Pin) = 301.0 acres (largest stand is 120.1 ac)

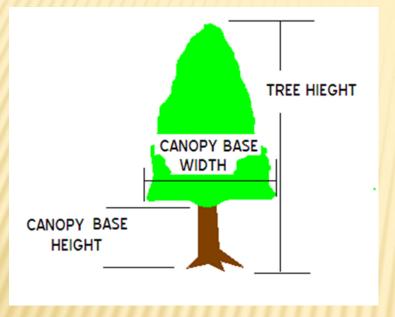


			Average
Average		Average	Tree
Crown Scorch		DBH	Height
11.40%		11.06	39.4

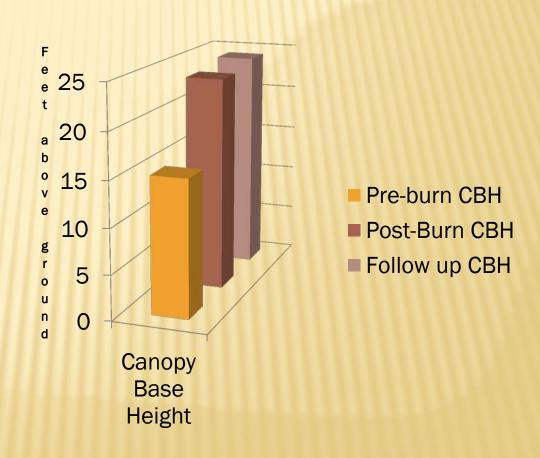

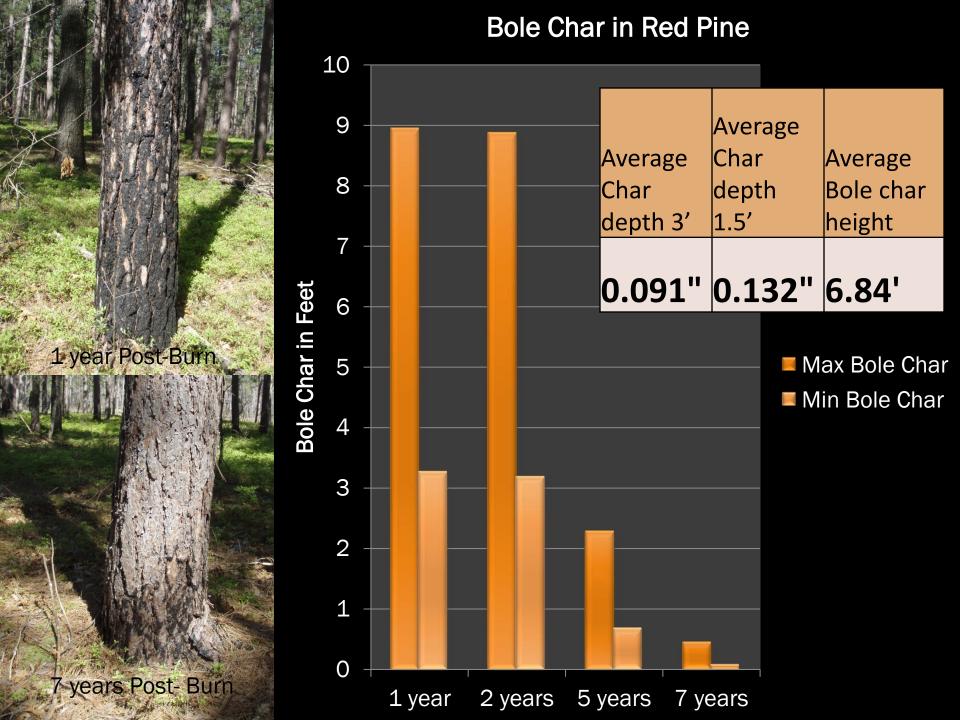

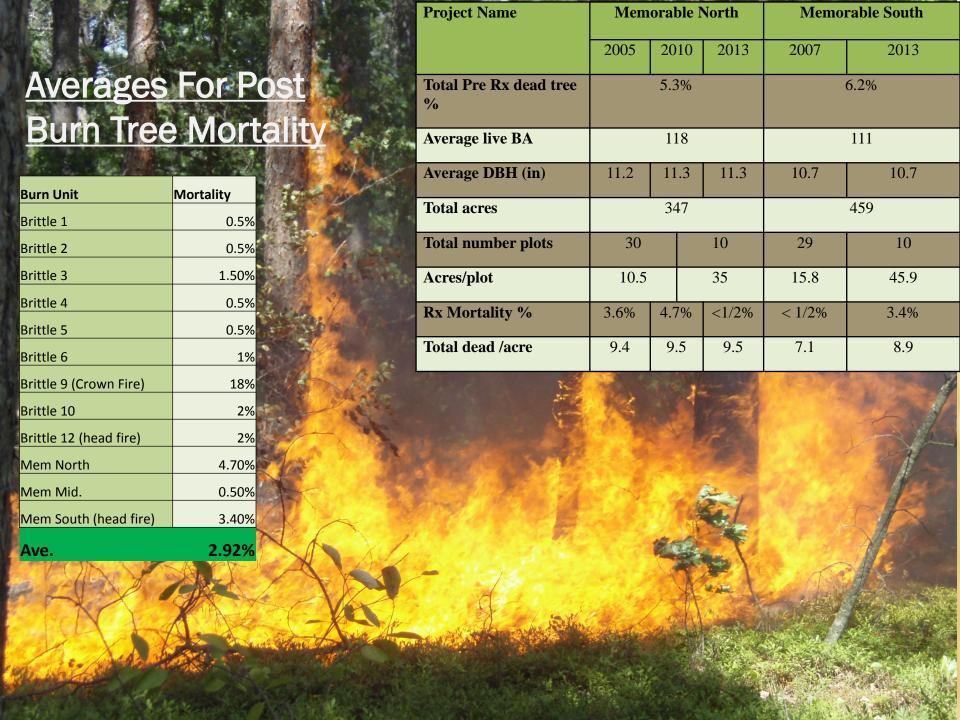


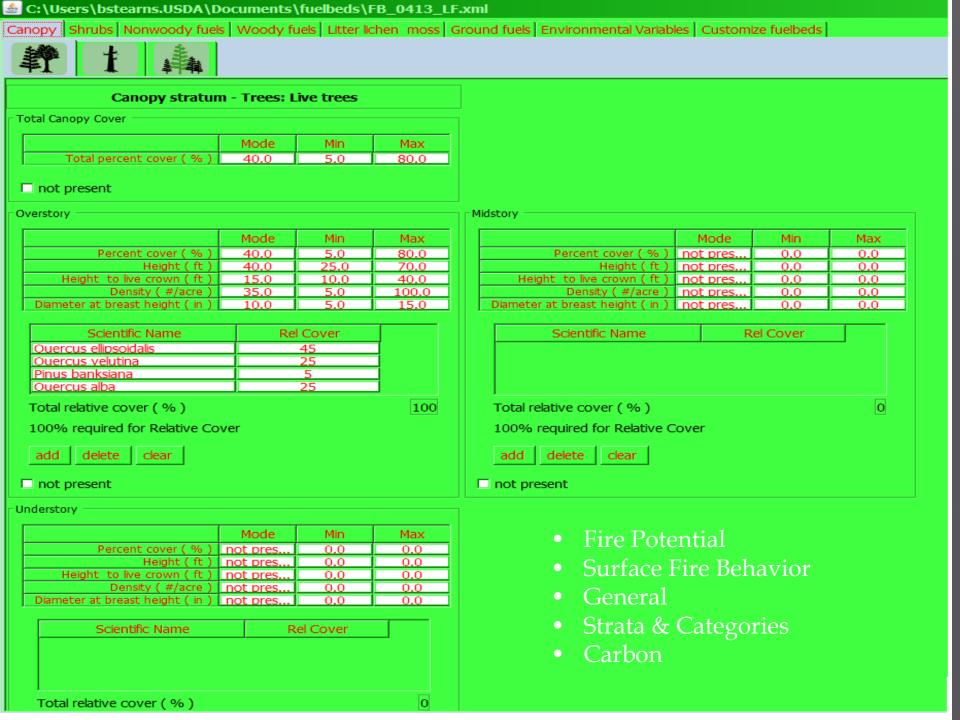

TU2 TL6 TL9 SB2

FUELS MAPPING

- Fire behavior modeling
- Tracking changes in fuel models

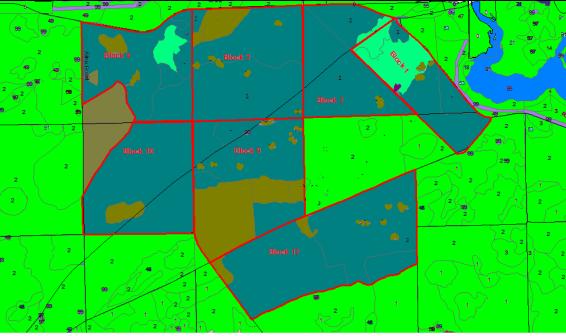



Author: Brian Stearns

Date: Jan 28 2011 - 12:51 AM

Fuelbed Name: Red pine -- pin oak Brittle with Slash

Fuelbed Number: N/A

File Name: C:\FCCS\conf\fuelbeds\user_fuelbeds\Brittle_slash.xml


Data quality ranking:

Original FBPS fuel model (13)*: 9 Standard fuel model (40)*: TU2

Description: Red pine plantation that were typically planted in the 1930's & 40's. Dense stands on poor sandy soils.								
Surface Fire Behavior Potential	6	Summary surface fire behavior potential, calculated as the maximum of spread potential and flame length potential scaled to an index between 0-9.						
Reaction Potential	4.9	Approximates the potential reaction intensity (energy released per unit area and time).						
Spread Potential	5.6	Proportional to the no-wind rate of spread in surface fuel (distance per unit time).						
Flame Length Potential	3.8	Proportional to fireline intensity or flame length.						
Crown Fire Potential	5	Weighted average of crown fire subpotentials.						
Crown fire initiation potential	4.3	Potential for fire to reach canopy layer.						
Crown-to-crown transmissivity potential	8.8	Potential for fire to carry through a canopy.						
Crown fire spreading potential	3.3	Relative index of crown fire rate of spread.						
Available Fuel Potential	3	Sum of fuel loadings in all combustion phases scaled to an index between 0-9.						
Flame available fuel potential	1.9	Sum of fuel loadings available for the flaming phase of combustion (in units of 10 tons/acre).						
Smoldering available fuel potential	1.2	Sum of fuel loadings available for the smoldering phase of combustion (in units of 10 tons/acre).						
Residual Available Fuel	0.2	Sum of fuel loadings available for the residual smoldering phase of combustion (in units of 10 tons/acre).						
FCCS Fire Potential Code	653	Three-digit code representing the surface fire behavior, crown fire, and available fuel potentials.						
*Based on dry fuel conditions (D2L	2 moisture scenario)	FCCS v 2.1						

Fuel Potential for Brittle (Pre and Post-Burn)

						A. A.
		Surface Fire	Crown Fire Initiation Potential	Available Fuel	FCCS Fire	
Fuel bed	Fuel Model	Potential (1-9)	(1-9)	Potential (1-9)	Potential Code	
Opening in Brittle Pre-burn	TU2	5	6	4	564	
Opening in Brittle Post-burn	TU2	6	4	2	642	
Red Pine-Oak Brittle pre-burn	TL9	6	5	3	653	
Red Pine-Oak Brittle post-burn	TL8	5	4	2	542	
Red Pine with slash pre-burn	SB2	6	7	3	673	
Red Pine with slash post-burn	TL8	5	4	2	542	
Red Pine with Aspen pre-burn	TL6	4	5	3	453	
Red Pine with Aspen post-burn	TL5	4	4	2	442	

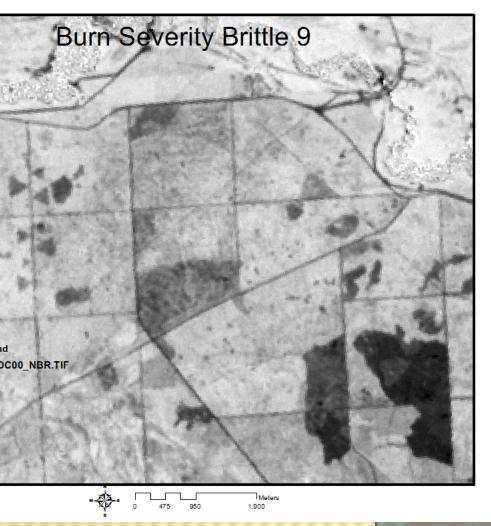

Burn Severity Mapping

Brittle Block Burn Intensity Map



